


JVM - 1351AS RF Shielded Box

Features

1. High Shielding Effectiveness up to -90dB.
2. Knife Edge Door for better shielding.
3. Frequency coverage up to 18 GHz.
4. Can be customize for size.
5. Can be customize up to frequency 40GHz.

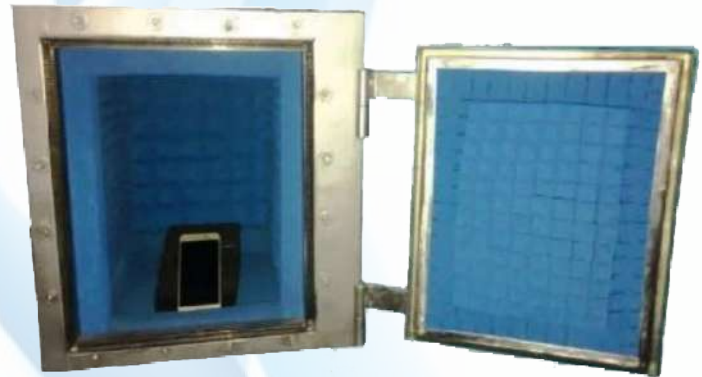

Technical Specification:

(A) Dimensions:

Inside: 300mm (D) x 250mm (W) x 300mm (W)

Outside: 450mm (D) x 450mm (W) X 500mm (H)

(B) Structure Composition: 2mm Galvanized Iron PAN Panel with RF Gasket.

(C) EUT Table: RF Absorbing Platform for keeping Equipment under Test.

(D) Shielding Effectiveness:

- | | |
|------------------|--------|
| a. 100MHz - 2GHz | >-90dB |
| b. 2GHz - 10GHz | >-80dB |
| c. 10GHz - 18GHz | >-60dB |

(E) I/O Pannel:

SMA/N/BNC/TNC RF Connectors: Minimum two.

USB: Minimum One.

DB9, DB25, Data line, GPS Interface, CCTV on Request

Note: Size can be customized as per user's requirement